



Equipment Rental Catalog



We Are Lowe.

Lowe Rental are a trusted exhibition rental partner to businesses across Asia and around the world. Renting best-in-class refrigeration, cold rooms and catering equipment wrapped in a seamless service provision that is designed to deliver expert guidance, easy ordering and complete support – from installation to maintenance and hassle-free removal – all in one comprehensive solution.

With over 48 years of industry experience, Lowe Rental are the global market leader of equipment rental solutions for food and beverage exhibitions. Sourcing from 50+ manufacturers worldwide, we offer an unparalleled range of cutting-edge equipment combined with innovative rental solutions to meet the evolving needs of our exhibitors.

Contents

01	Display Refrigeration		06	Hot Holding Equipment	
	A1K / A2K.....	5		GN-1DW.....	27
	C1B/ C2B/ C1A.....	5		GN-2DW.....	27
	D1C.....	6		H16A/H16B.....	31
	D3/D4.....	6		H24A.....	28
	E11/E21.....	7		H25A.....	28
	E1AA.....	7		H42B.....	28
	E5.....	8		H10A.....	29
	E6A.....	8		H14A.....	29
	G4.....	9		H14D.....	29
	G6.....	9		H23C.....	30
	G1.....	10		H23B.....	30
	G7.....	10	07	Grills	
	K1T.....	11		H18A.....	31
	K3/ K4.....	11		H33.....	31
	M1.....	12		H8A.....	31
	L1A.....	12		H9A.....	31
	H3A.....	13	08	Preparation Equipment	
	H3DD.....	13		H36A.....	32
	N2.....	14		H44A.....	32
	H1W.....	14		H44B.....	32
	G4W.....	15		H20B/H20C.....	33
	S1/S2.....	15		H20C3T.....	33
02	Storage Refrigeration			H20CDD.....	33
	H1/H1C/H2.....	16		4 Tier Racking.....	34
	F1/F2/F3.....	16		H69.....	34
	Fish Tank L.....	17	09	Table Top Appliances	
	GN2DBC/GN2DBF.....	17		H54A.....	35
	GN3DBC/GN3DBF.....	18		H54B.....	35
	GN1DUC/GN1DUF.....	18		H31A.....	35
	GN2DUC/ GN2DUF.....	19		H37.....	36
	GN1DUC/F Dual.....	19		H61.....	36
03	Modular Cold Rooms			H43A.....	36
	Modular Walk-In Cold Rooms.....	20		H43B.....	37
04	Ovens			H45.....	37
	GN Combi Oven.....	22		H46A.....	37
	H17A.....	22		H13.....	38
	H28B.....	23		H35.....	38
	H32.....	23	10	Coffee and Drinks	
	H12A.....	23		H11A.....	30
	H12B.....	24		H11B.....	30
	H17B.....	24		H7.....	30
	H17C.....	25		H6A.....	30
	H28A.....	25	11	Warewashing	
05	Fryers			DGW.....	30
	DEF28.....	26		H21A.....	30
	H15A.....	26		H21B.....	30
	H15B.....	26	12	Trollys	
				H34A/B.....	30

Curved Glass Display Counter

A1K/A2K

At a Glance

Model	A1K	A2K
External (WxDxH) (mm)	1330 x 940 x 1200	1955 x 940 x 1200
Display (m ²)	0.93	1.38
Temperature Range (°C)	+2 to +5	+2 to +5
Storage (Litres)	250	380
Power Requirement (V/Hz)	200/220/50	200/220/50
Watts (W)	500	700
Amps (A)	13	13

Features

- Fan assisted
- Refrigeration storage
- Suitable for crushed ice display



Dairy Case

C1B/ C2B/C1A

At a Glance

Model	C1A	C1B	C2B	C3T
External (WxDxH) (mm)	660 x 760 x 1500	1002 x 800 x 2010	1315 x 800 x 2010	2020 x 860 x 2050
Display (m ²)	0.65	1.80	2.10	2.90
Temperature Range (°C)	+2 to +10	+0 to +8	+0 to +8	+2 to +8
Storage (Litres)	180	560	750	1619
Power Requirement (V/Hz)	220/240/50	220/240/50	220/240/50	200/220/50
Watts (W)	1100	1500	2000	2500
Amps (A)	13	13	13	16

Features

- Multideck
- Fan assisted
- Internal light



C1A



C1B/ C2B

Curved Glass Display Freezer

D1C

At a Glance

Model	D1C
External (WxDxH) (mm)	1500 x 675 x 850
Temperature Range (°C)	-10 to -20
Storage (Litres)	500
Power Requirement (V)	220
Power Requirement (kW/24hr)	3.76
Watts (W)	500
Amps (A)	13

Features

- Internal light
- Includes x 5 baskets
- Basket size is 580mm x 260mm x 180mm



Open Top Display Island

D3/D4

At a Glance

Model	D3	D4
External (WxDxH) (mm)	1370 x 938 x 1050	1970 x 938 x 1050
Display (m²)	0.98	1.47
Temperature Range (°C)	+2 to +10 / -10 to -20	+2 to +10 / -10 to -20
Storage (Litres)	262	393
Power Requirement (V/Hz)	220/50	220/50
Watts (W)	2800	2800
Amps (A)	16	16

Features

- Integral unit
- Automatic defrost
- Part glazed sides all round



Curved Glass Display Freezer Glass Sliding Lid

E1I/E2I

At a Glance

Model	E1I	E2I
External (WxDxH) (mm)	1450 x 850 x 870	2100 x 850 x 870
Temperature Range (°C)	-10 to -20	-10 to -20
Storage (Litres)	575	900
Power Requirement (V/Hz)	200/240/50	200/240/50
Power Requirement (kW/24hr)	6.73	10.36
Watts (W)	1000	1500
Amps (A)	13	13

Features

- Internal light
- Sliding lids



Curved Glass Display Freezer

E1AA

At a Glance

Model	E1AA
External (WxDxH) (mm)	1000 x 694 x 850
Temperature Range (°C)	-10 to -20
Storage (Litres)	274
Power Requirement (V/Hz)	200/220/50
Watts (W)	500
Amps (A)	13

Features

- Includes 2 baskets
- Internal light
- Sliding lids



Scoop Ice Cream Cabinet

E5

At a Glance

Model	E5
External (WxDxH) (mm)	1350 x 838 x 1270
Display (m²)	9 x GN Pan
Temperature Range (°C)	-10 to -20
Storage (Litres)	415
Power Requirement (V/Hz)	200/220/50
Watts (W)	1000
Amps (A)	13

Features

- Frozen storage at the rear
- Internal light
- Curved glass



4 Sided Display Chiller/Freezer

E6A

At a Glance

Model	E6A
External (WxDxH) (mm)	1000 x 951 x 895
Temperature Range (°C)	-10 to -20
Storage (Litres)	158
Power Requirement (V/Hz)	200/220/50
Watts (W)	1000
Amps (A)	13

Features

- Overhead canopy lighting
- Automatic system for evaporation of condensing water



Upright Display Chiller

G4

At a Glance

Model	G4
External (WxDxH) (mm)	610 x 2000 x 640
Temperature Range (°C)	+2 to +10
Storage (Litres)	400
Power Requirement (V/Hz)	200/220/50
Watts (W)	500
Amps (A)	13

Features

- Fan assisted
- Adjustable shelving
- Internal light



2 Door Display Chiller

G6

At a Glance

Model	G6
External (WxDxH) (mm)	1260 x 730 x 2060
Temperature Range (°C)	+2 to +10
Storage (Litres)	976
Power Requirement (V/Hz)	200/220/50
Watts (W)	1050
Amps (A)	13

Features

- Fan assisted
- Hinged doors
- Adjustable shelving
- Internal light
- Light canopy



Upright Display Freezer

G1

At a Glance

Model	G1
External (WxDxH) (mm)	660 x 714 x 1956
Temperature Range (°C)	-10 to -20
Storage (Litres)	460
Power Requirement (V/Hz)	200/220/50
Watts (W)	1000
Amps (A)	13

Features

- Internal light
- Fan assisted
- Adjustable shelf



2 Door Display Freezer

G7

At a Glance

Model	G7
External (WxDxH) (mm)	1260 x 730 x 2060
Temperature Range (°C)	-10 to -20
Storage (Litres)	976
Power Requirement (V/Hz)	200/220/50
Watts (W)	1680
Amps (A)	13

Features

- Fan assisted
- Hinged doors
- Adjustable shelving
- Internal light
- Light canopy



4 Sided Glass Door Display Chiller/Freezer

K1T

At a Glance

Model	K1T
External (WxDxH) (mm)	650 x 650 x 1908
Temperature Range (°C)	-18 to -22; 0 to +10
Storage (Litres)	400
Power Requirement (V/Hz)	200/220/50
Watts (W)	2000
Amps (A)	13

Features

- Fixed shelves
- Fan assisted



6 Sided Glass Door Display Chiller/Freezer

K3/K4

At a Glance

Model	K3	K4
External (WxDxH) (mm)	910 x 850 x 1830	910 x 850 x 1830
Temperature Range (°C)	+2 to +10	-10 to -20
Storage (Litres)	570	570
Power Requirement (V/Hz)	220/50	220/50
Watts (W)	2000	2000
Amps (A)	13	13

Features

- Rotating circular shelves
- Fan assisted
- Internal light



Domed Display Chiller

M1

At a Glance

Model	M1
External (WxDxH) (mm)	1300 x 1300 x 1340
Display (m²)	0.90
Temperature Range (°C)	+2 to +10
Power Requirement (V/Hz)	200/220/50
Watts (W)	500
Amps (A)	13

Features

- Suitable for crushed ice display
- Internal light
- Fan assisted



Curved Glass Pâtisserie Case

L1A

At a Glance

Model	L1A
External (WxDxH) (mm)	1200 x 740 x 1300
Temperature Range (°C)	+2 to +10
Storage (Litres)	360
Power Requirement (V/Hz)	200/220/50
Watts (W)	1000
Amps (A)	13

Features

- Fan assisted
- Adjustable glass shelving
- Internal light on each shelf



1 Door Back Bar Chiller

H3A

At a Glance

Model	H3A
External (WxDxH) (mm)	500 x 550 x 860
Temperature Range (°C)	+2 to +10
Storage (Litres)	88
Power Requirement (V/Hz)	200/220/50
Watts (W)	500
Amps (A)	13

Features

- Front venting
- Fan assisted
- Internal light
- Adjustable shelving



2 Door Back Bar Chiller

H3DD

At a Glance

Model	H3DD
External (WxDxH) (mm)	900 x 550 x 860
Temperature Range (°C)	+2 to +10
Storage (Litres)	172
Power Requirement (V/Hz)	200/220/50
Watts (W)	500
Amps (A)	13

Features

- Front venting
- Fan assisted
- Internal light
- Adjustable shelving



Counter Top Freezer

N2

At a Glance

Model	N2
External (WxDxH) (mm)	620 x 575 x 836
Temperature Range (°C)	-18 to -22
Storage (Litres)	113
Power Requirement (V/Hz)	200/220/50
Watts (W)	1000
Amps (A)	13

Features

- Static cooling
- Internal light
- Adjustable shelving



Wine Display Chiller

H1W

At a Glance

Model	H1W
External (WxDxH) (mm)	595 x 598 x 854
Temperature Range (°C)	+2 to +10
Storage	28 Bottles
Power Requirement (V/Hz)	200/220/50
Watts (W)	500
Amps (A)	13

Features

- Static cooling
- Adjustable shelving



Wine Display Chiller

G4W

At a Glance

Model	G4W
External (WxDxH) (mm)	595 x 680 x 1770
Temperature Range (°C)	Dual Zone +2 to +10
Storage	415L upper 88 bottles lower: 83 bottles
Power Requirement (V/Hz)	220/240/50
Watts (W)	500
Amps (A)	13



Sushi Bar

S1/S2

At a Glance

Model	S1	S2
External (WxDxH) (mm)	1177 x 420 x 265	1800 x 420 x 265
Temperature Range (°C)	0 to +12	0 to +12
Power Requirement (V/Hz)	200/220/50	200/220/50
Watts (W)	500	500
Amps (A)	13	13



Features

- Internal LED light

Storage Chiller/Freezer

H1/H1C/H2

At a Glance

Model	H1	H1C	H2
External (WxDxH) (mm)	506 x 567 x 850	540 x 630 x 1600	600 x 585 x 855
Temperature Range (°C)	+2 to +8	lower +2 to +6/ upper -18	-10 to -20
Storage (Litres)	145	170	129
Power Requirement (V/Hz)	200/220/50	200/220/50	200/220/50
Watts (W)	500	500	500
Amps (A)	13	13	13



H2



H1

Chest Freezer

F1/F2/F3

At a Glance

Model	F1	F2	F3
External (WxDxH) (mm)	734 x 600 x 840	1314 x 743 x 852	1510 x 743 x 852
Temperature Range (°C)	-10 to -20	-10 to -20	-10 to -20
Storage (Litres)	142	375	447
Power Requirement (V/Hz)	200/220/50	200/220/50	200/220/50
Watts (W)	500	500	500
Amps (A)	13	13	13



Fish Tank

Fish Tank L

At a Glance

Model	Fish Tank L
External (WxDxH) (mm)	Bottom Section: 1560 x 560 x 840 Glass Section: 1500 x 500 x 560
Temperature Range (°C)	+5 to +22
Storage (Litres)	400
Power Requirement (V/Hz)	220/50
Watts (W)	1000
Amps (A)	13

Features

- Integral unit
- Filtration system
- Internal light
- Adjustable temperature range
- Adjustable PH and salinity levels



Bench Chiller/Freezer

GN2DBC/GN2DBF

At a Glance

Model	GN2DBC	GN2DBF
External (WxDxH) (mm)	1360 x 700 x 860	1360 x 700 x 860
Temperature Range (°C)	+2 to +10	-10 to -20
Storage (Litres)	314	314
Power Requirement (V/Hz)	220/240/50	220/240/50
Watts (W)	1000	1000
Amps (A)	13	13

Features

- Fan assisted
- Adjustable shelving



Bench Chiller/Freezer

GN3DBC/GN3DBF

At a Glance

Model	GN3DBC	GN3DBF
External (WxDxH) (mm)	1795 x 700 x 860	1795 x 700 x 860
Temperature Range (°C)	+2 to +10	-10 to -20
Storage (Litres)	465	465
Power Requirement (V/Hz)	200/240/50	200/240/50
Watts (W)	1000	1000
Amps (A)	13	13

Features

- Fan assisted
- Adjustable shelving



Upright Chiller/Freezer

GN1DUC/GN1DUF

At a Glance

Model	GN1DUC	GN1DUF
External (WxDxH) (mm)	680 x 845 x 2000	680 x 845 x 2000
Temperature Range (°C)	+2 to +10	-10 to -20
Storage (Litres)	537	537
Power Requirement (V/Hz)	200/240/50	200/240/50
Watts (W)	1000	1000
Amps (A)	13	13

Features

- Fan assisted
- Adjustable shelving



Upright Chiller/Freezer

GN2DUC/GN2DUF

At a Glance

Model	GN2DUC	GN2DUF
External (WxDxH) (mm)	1340 x 845 x 2000	1340 x 845 x 2000
Temperature Range (°C)	+2 to +10	-10 to -20
Storage (Litres)	1173	1173
Power Requirement (V/Hz)	200/240/50	200/240/50
Watts (W)	1000	1500
Amps (A)	13	13

Features

- Fan assisted
- Adjustable shelving



Dual Chiller/Freezer

GN1DUC/F DUAL

At a Glance

Model	GN1DUC/F DUAL
External (WxDxH) (mm)	680 x 845 x 2000
Temperature Range (°C)	+2 to +10 / -10 to -20
Storage (Litres)	Per Compartment: 129
Power Requirement (V/Hz)	200/240/50
Watts (W)	2000
Amps (A)	13

Features




- Fan assisted
- Adjustable shelving



Modular Walk-In Cold Rooms



16 Amp
Blue C Form



Features

- Suitable for indoor and outdoor use
- Digital Temperature Rangeerature display
- Lockable door and emergency door release
- Full maintenance back up

Notes: The number of mono block units per room are based on a low/medium usage with a maximum ambient of +30 °C.

If the Cold Room is to be used constantly and the door to be left open for long periods or used in ambients above +30 °C then additional mono block units should be fitted to the Cold Room.

Dimensions, Functions and Optional Extras

Model	8x8ft Chiller/Freezer	8x12ft Chiller/Freezer	8x16ft Chiller/Freezer	8x20ft Chiller/Freezer
External (WxDxH) (mm)	2400 x 2200 x 2400	3600 x 2200 x 2400	4800 x 2200 x 2400	6000 x 2200 x 2400
Temperature Range (°C)	-2 to +10 / -18 to -22	-2 to +10 / -18 to -22	-2 to +10 / -18 to -22	-2 to +10 / -18 to -22
Max Pallets*	4	6	8	610
Maximum No. of Racking (Optional Extra)**	2	3	4	5
No. Sockets Required 16 amp (Chiller/ Freezer)	1/1	2/2	2/2	2/3
No of Monoblock Motors Per Cold Room (Chiller/ Freezer)	1/1	2/2	2/2	2/3
Power Requirement (V/Hz)	200/240/50	200/240/50	200/240/50	200/240/50
Watts (W)	1 x 2000 per motor	2 x 2000 per motor	2 x 2000 per motor	3 x 2000 per motor
Amps (A)	16	16	16	16

* This is the maximum number of pallets and should be used as guidance only. Please ensure that space is free to walk into the room and/or get the pallet truck in if required.

** Additional cost; All racking is 1.2 m.

Optional Extras (at an additional cost)



Racking



Extension Leads




Pallet Door & Ramps



Additional Motors

Motor Placements

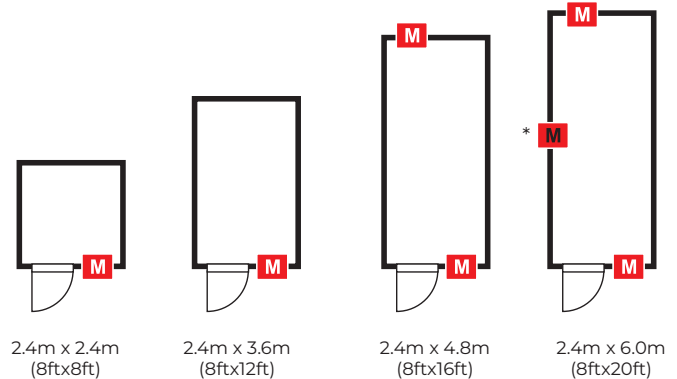

*Additional mono block units for the freezer.

Delivery and Installation

- Lowe Rental require a flat surface to build upon.
- 2.5kw power per 2.5m room needs to be supplied.
- 1x 16mp commando socket required per motor.
- 1m of additional space must be given around the room for good ventilation.
- Room must be destocked prior to collection.
- Access restrictions / lifts / stairs must be mentioned in advance. Lowe may need to do a site survey to ensure the Cold Room(s) can be built where required. This site survey is at an additional cost.
- 32amp splitters available, 32amp power required.

GN Combi Oven and Base

GN-COMBI

At a Glance

Model	GN-COMBI
External (WxDxH) (mm)	1010 x 970 x 1250
Temperature Range (°C)	10 to 300
Storage	10 x GN 1/1 Tray
Power Requirement (V)	3N-380
Watts (kW)	17.3
Amps (A)	32

Features

- 10 x GN 1/1 Tray 25mm or 10 x GN 1/1 65mm pan
- Fan assisted cooking function
- Steam function
- Cooking & steam combination function
- Regeneration hot air & steam function
- Internal light
- Timer
- Digital setting and temperature read out

Water connection in/out on request



32Amp
3 Phase



Convection Oven

H17A

At a Glance

Model	H17A
External (WxDxH) (mm)	600 x 600 x 560
Electrical Requirement (V/W/A)	220-240/2800/16
Temperature Range (°C)	+50 to 250
Watts (kW)	22
Amps (A)	16

Features

- 2 x Cooking tray (435mm W x 320mm D)
- Fan assisted cooking function
- Adjustable tray
- Internal light
- Timer
- Manual temperature adjustment



16 Amp
Blue C Form



Dual Pizza Oven

H28B

At a Glance

Model	H28B
External (WxDxH) (mm)	920 x 830 x 790
Electrical Requirement (V/kW/A)	3N-380/8.4/32
Temperature Range (°C)	400
Watts (kW)	8.4
Amps (A)	32



32Amp
3 Phase



Electric Rotisserie (30 Chicken Capacity)

H32

At a Glance

Model	H32
External (WxDxH) (mm)	1000 x 860 x 1110
Electrical Requirement (V/W/A)	3N 380/11000/32
Weight (Kg)	195



32Amp
3 Phase



Microwave Oven

H12A

At a Glance

Model	H12A
External (WxDxH) (mm)	480 x 290 x 360
Electrical Requirement (V/W/A)	220/750/13
Watts (kW)	0.75
Amps (A)	13



Commercial Microwave

H12B

At a Glance

Model	H12B
External (WxDxH) (mm)	520 x 400 x 310
Electrical Requirement (V/W/A)	220/1800/13
Watts (kW)	18
Amps (A)	13



Conventional Toaster Oven

H17B

At a Glance

Model	H17B
External (WxDxH) (mm)	660 x 355 x 390
Electrical Requirement (V/W/A)	220/2000/13
Temperature Range (°C)	+30 to +220

Features

- Hot air cooking
- Adjustable tray
- Timer
- Manual temperature adjustment



GN1/1 4 Tray Convection Oven

H17C

At a Glance

Model	H17C
External (WxDxH) (mm) Oven	820 x 625 x 625
External (WxDxH) (mm) Base	820 x 650 x 880
Electrical Requirement (V/W/A)	220/3100/16
Temperature Range (°C)	+60 to 250

Features

- 4 x GN 1/1 tray or 4 x GN 1/1 65mm pan
- Fan assisted cooking – upper grill function
- Fan assisted cooking
- Upper grill function
- Internal light
- Timer
- Digital setting and temperature read out



16 Amp
Blue C Form



Dual Pizza Oven

H28A

At a Glance

Model	H28A
External (WxDxH) (mm)	584 x 635 x 530
Electrical Requirement (V/kW/A)	220/2.85/16
Temperature Range (°C)	400
Watts (kW)	2.85
Amps (A)	16



16 Amp
Blue C Form



Floor Standing Dual Deep Fat Fryer

H15D

At a Glance

Model	H15D
External (WxDxH) (mm)	400 x 800 x 1100
Storage (Litres)	28
Power Requirement (V)	3N-380
Watts (kW)	18
Amps (A)	32

Features

- Static cooling
- Internal light
- Adjustable shelving



32Amp
3 Phase



Counter Top Single Electric Deep Fat Fryer

H15A

At a Glance

Model	H15A
External (WxDxH) (mm)	260 x 410 x 340
Electrical Requirement (V/W/A)	220/3500/16
Capacity (L)	8

- Special 16 amp power line required



16 Amp
Blue C Form



Counter Top Dual Electric Deep Fat Fryer

H15B

At a Glance

Model	H15B
External (WxDxH) (mm)	670 x 440 x 335
Electrical Requirement (V/kW/A)	220/3.5 + 3.5/16x2
Capacity (L)	2 x 11

Features

- 2 power cables
- Special 16 amp power line required



16 Amp
Blue C Form
x 2



1 Door Warmer Cart

GN-1DW

At a Glance

Model	GN-1DW
External (WxDxH) (mm)	800 x 980 x 1795
Temperature Range (°C)	+50 to 110
Storage	22 x GN 1/1 Pan (Pan depth upto 100mm)
Power Requirement (V/Hz)	200/220/50
Watts (kW)	2.62
Amps (A)	13



2 Door Warmer Cart

GN-2DW

At a Glance

Model	GN-2DW
External (WxDxH) (mm)	1480 x 870 x 1790
Temperature Range (°C)	+50 to +110
Storage	44 x GN 1/1 Pan (Pan depth up to 100mm)
Power Requirement (V/Hz)	200/220/50
Watts (kW)	2.62
Amps (A)	13



Single GN 1/1 Pan Baine Marie

H24A

At a Glance

Model	H24A
External (WxDxH) (mm)	338 x 540 x 248
Electrical Requirement (V/W/A)	220/1500/13

- Counter top warmer



Counter Top Bain-Marie

H25A

At a Glance

Model	H25A
External (WxDxH) (mm)	1530 x 400 x 700
Electrical Requirement (V/W/A)	220/3500/16

Features

- 5 x GN 1/1 Pan – Pan depth 100mm
- Special 16mp power line required



16 Amp
Blue C Form



GN Hot/Cold Box

H42B

At a Glance

Model	H42B
External (WxDxH) (mm)	470 x 1470 x 680

Features

- 6 x GN 1/1 tray capacity



Commercial Induction Hot Plate

H10A

At a Glance

Model	H10A
External (WxDxH) (mm)	330 x 420 x 100
Electrical Requirement (V/W/A)	220/3500/16

- Special 16 amp power line required



16 Amp
Blue C Form



Single Hot Plate

H14A

At a Glance

Model	H14A
External (WxDxH) (mm)	335 x 265 x 110
Electrical Requirement (V/W/A)	220/1500/13



Electric Hot Plate

H14D

At a Glance

Model	H14D
External (WxDxH) (mm)	760 x 450 x 50
Electrical Requirement (V/W/A)	220/500/13



Dual Heat Lamp

H23G

At a Glance

Model	H23G
Electrical Requirement (V/W/A)	220/500/13



4 Heat Lamp Bridge Warmer

H23B

At a Glance

Model	H23B
External (WxDxH) (mm)	1360 x 530 x 760
Electrical Requirement (V/W/A)	220/1800/13



Table Top Warmer

H16A

At a Glance

Model	H16A
External (WxDxH) (mm)	660 x 440 x 635
Electrical Requirement (V/A)	220/13



Table Top Warmer

H16B

At a Glance

Model	H16B
External (WxDxH) (mm)	1200 x 480 x 810
Electrical Requirement (V/A)	220/13



Electric Hot Plate Flat

H9A

At a Glance

Model	H9A
External (WxDxH) (mm)	550 x 430 x 220
Electrical Requirement (V/W/A)	220/3500/16



16 Amp
Blue C Form



Salamander

H18A

At a Glance

Model	H18A
External (WxDxH) (mm)	615 x 540 x 480
Electrical Requirement (V/W/A)	220/4000/16

- Special 16 amp power line required



16 Amp
Blue C Form



Counter Top Lava Rock Electric Grill

H33

At a Glance

Model	H33
External (WxDxH) (mm)	650 x 620 x 480
Electrical Requirement (V/W/A)	220/7200/32



32 Amp
Single Phase



Barbeque Grill

H8A

At a Glance

Model	H8A
External (WxDxH) (mm)	490 x 300 x 360
Electrical Requirement (V/W/A)	220/1500/13

Features

- Used for vegetables, meat or seafood



Meat Slicer

H36A

At a Glance

Model	H36A
External (WxDxH) (mm)	615 x 510 x 525
Electrical Requirement (V/W/A)	220/250/13
Blade Diameter (mm)	300



Stainless Steel Table

H20B/H20C

At a Glance

Model	H20B	H20C
External (WxDxH) (mm)	1200 x 600 x 850	1800 x 600 x 850



3 Tier Stainless Steel Table

H20C3T

At a Glance

Model	H20C3T
External (WxDxH) (mm)	1800 x 700 x 850



Stainless Steel Table With 2 Upper Shelves

H20CDD

At a Glance

Model	H20CDD
External (WxDxH) (mm)	1800 x 700 x 850 (+660 x 2)
Upper Shelf Height (mm)	600



4 Tier Racking

Racking

At a Glance

Model	Racking
External (WxDxH) (mm)	1220 x 356 x 1600

Features

- 304 Stainless Steel



Jack Stand

H69

At a Glance

Model	Racking
External (WxDxH) (mm)	800 x 800 x 1800

Features

- 84 plate capacity



Rotary Toaster

H54A

At a Glance

Model	H54A
External (WxDxH) (mm)	368 x 418 x 387
Electrical Requirement (V/kW/A)	220/1.94/13
Slices per hour	300/350



Toaster

H54B

At a Glance

Model	H54B
External (WxDxH) (mm)	370 x 225 x 210
Electrical Requirement (V/W/A)	220/ 2500 /13



Panini/Sandwich Press

H31A

At a Glance

Model	H31A
External (WxDxH) (mm)	450 x 200 x 400
Electrical Requirement (V/W/A)	220/3500/16

- Special 16 amp power line required



16 Amp
Blue C Form



Counter Top Steamer

H37

At a Glance

Model	H37
External (WxDxH) (mm)	380 x 745 x 400
Electrical Requirement (V/W/A)	220/1500/13
Temperature Range (°C)	0 to 110



Soup Kettle

H61

At a Glance

Model	H61
External (DxH) (mm)	400 x 380
Electrical Requirement (V/W/A)	220/250/13
Capacity (L)	10



Blender

H43A

At a Glance

Model	H43A
External (WxDxH) (mm)	200 x 245 x 345
Electrical Requirement (V/W/A)	220/500/13



Hand Blender

H43B

At a Glance

Model	H43B
External (DxH) (mm)	70 x 395
Electrical Requirement (V/W/A)	220/500/13



Electric Kettle

H45

At a Glance

Model	H45
External (WxDxH) (mm)	135 x 250 x 255
Electrical Requirement (V/W/A)	220/2500/13



Electric Water Boiler

H46A

At a Glance

Model	H46A
External (DxH) (mm)	320 Diameter x 550
Electrical Requirement (V/W/A)	220/3000/16
Capacity (L)	25



16 Amp
Blue C Form



Electric Fry Pan/Hot Pan

H13

At a Glance

Model	H13
External (WxDxH) (mm)	400 x 340 x 150
Electrical Requirement (V/W/A)	220/1200/13



Roll Top Chafing Dish

H35

At a Glance

Model	H35
External (WxDxH) (mm)	630 x 450 x 480
Electrical Requirement (V/W/A)	220/500/13



Rice Cooker

H30

At a Glance

Model	H30
External (WxDxH) (mm)	400 x 330 x 400
Electrical Requirement (V/W/A)	220/1500/13



Premier Coffee Machine

H11A

At a Glance

Model	H11A
External (WxDxH) (mm)	280 x 320 x 420
Electrical Requirement (V/W/A)	220/1500/13
Water Tank Capacity (L)	2

- Coffee beans not supplied



10 Cup Coffee Machine

H11B

At a Glance

Model	H11B
External (WxDxH) (mm)	170 x 200 x 240
Electrical Requirement (V/W/A)	220/1000/13

- Includes filter
- Filter coffee not supplied



Water Dispensers

H7

At a Glance

Model	H7
External (WxDxH) (mm)	300 x 300 x 900
Electrical Requirement (V/W/A)	220/650/13
Capacity (L)	3 x 20

Features

- 3 x Bottle water




2 Bowl Juice Dispenser

H6A

At a Glance

Model	H6A
External (WxDxH) (mm)	430 x 430 x 640
Electrical Requirement (V/W/A)	220/500/13

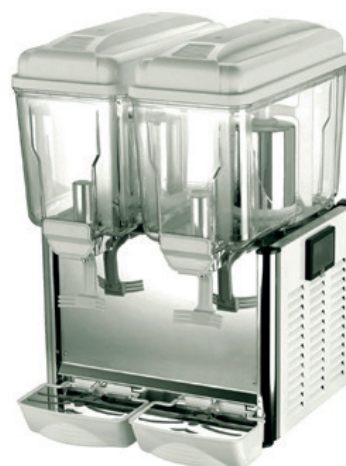

Dish/Glass Washer

DGW

At a Glance

Model	DGW
External (WxDxH) (mm)	697 x 683 x 1579
Power (V)	3N-380
Watts (kW)	18
Amps (A)	32

Features

- 2 minute wash cycle
- 2 plastic trays included
- In-Let: 1 x 13mm diameter
- Drainage: 1 x 40mm diameter
- Available in Hong Kong only

Stand 500mm H to be provided by customer



32Amp
3 Phase



Stainless Steel Single Sink

H21A

At a Glance

Model	H21A
External (WxDxH) (mm)	700 x 690 x 960
Internal (WxDxH) (mm)	560 x 510 x 260
Water In-Let (mm)	1 x 20 diameter
Water Out-Let (mm)	1 x 30 diameter

Features

- Grease trap & water in/out connection can be provided on request grease trap sump pump 220/16A



Stainless Steel Dual Sink

H21B

At a Glance

Model	H21B
External (WxDxH) (mm)	1200 x 690 x 960
Internal (WxDxH) (mm)	2 x 450 x 510 x 260
Water In-Let (mm)	1 x 20 diameter
Water Out-Let (mm)	2 x 30 diameter

Features

- Grease trap & water in/out connection can be provided on request grease trap sump pump 220/16A



GN 2/1,1/1 Pans Various Size & Depth

H34A/H34B

At a Glance

Model	H34A	H34B
External (WxDxH) (mm)	(GN 1/1 Pan: 325 x 530) x 1800	(GN 2/1 Pan: 650 x 530) x 1800



Addresses

UK

Northern Ireland (HQ)

Lissie Industrial Estate East
9 Lissie Walk
Lisburn
BT28 2LU
+44 28 9260 4619

Marchington

Unit 37
Marchington Industrial Estate
Uttoxeter
Staffordshire
ST14 8LP
+44 1283 820 717

Cheltenham

Malvern View Business Park
Stella Way
Bishops Cleeve
Cheltenham
GL52 7DQ
+44 1242 663 000

EUROPE

Germany

Kressenweg 10
22549 Hamburg
+49 40 4136 1315

Spain

Paseo de la Castellana
200, Office 521
28046 Madrid
+34 87 6503 977

Ronda Feria de Muestras 20,
Naves B4-B5,
50197 Zaragoza
+34 87 6503 977

USA

Georgia

615 Hwy 74 S
Peachtree City
Georgia 30269
+1 77 0461 9001

Texas

6101 Campus Dr
Fort Worth
Texas 76140
+1 77 0461 9001

GCC

Saudi Arabia

Unit No 2588
Al Mafsala Street
Al Suly District
Riyadh 14324 – 8169 10001
+966 500 97 4422

United Arab Emirates Office No.

412/13
CEO Building
PO Box 392327
Dip 1, Dubai UAE
+971 4882 9440

ASIA

Singapore

#04-01
18 Tampines Industrial Crescent
Singapore 528605
+65 6284 1552

Hong Kong

No. 109, Kam Sheung Road,
Yuen Long, New Territories,
Hong Kong
+852 2659 5300

